

FUJIFILM DIRECT DUPLICATING FILM PET-63、PET-100

Exposure Index 0.2 by Tungsten light exposure and AP5 standard processing.
The exposure index is based on formula 45/E (M.C.S.) at a density of 1.2 above gross fog.

Sensitivity Orthochromatic

Safelight A safelight lamp should be equipped with Fuji safelight glass SLG2B (Red) or SLG6B(Deep Red) and a 20-watt bulb, and should be kept at least four feet (1.2 meters) from the film.

Base


PET-100	Polyester	Clear base	0.100 mm (4 mils)
PET-63	Polyester	Clear base	0.063 mm (2.5 mils)

Resolving Power


Test Object Contrast	Lines/mm
1:1000	1200

Measured on Fuji Resolution Tester Model FRE-1


Characteristic Curve

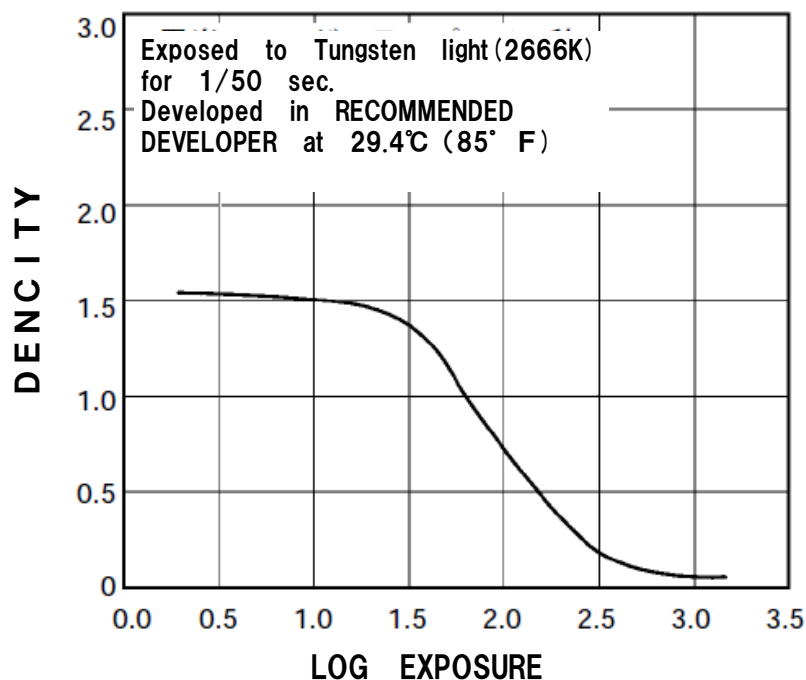

Spectral Sensitivity Curve

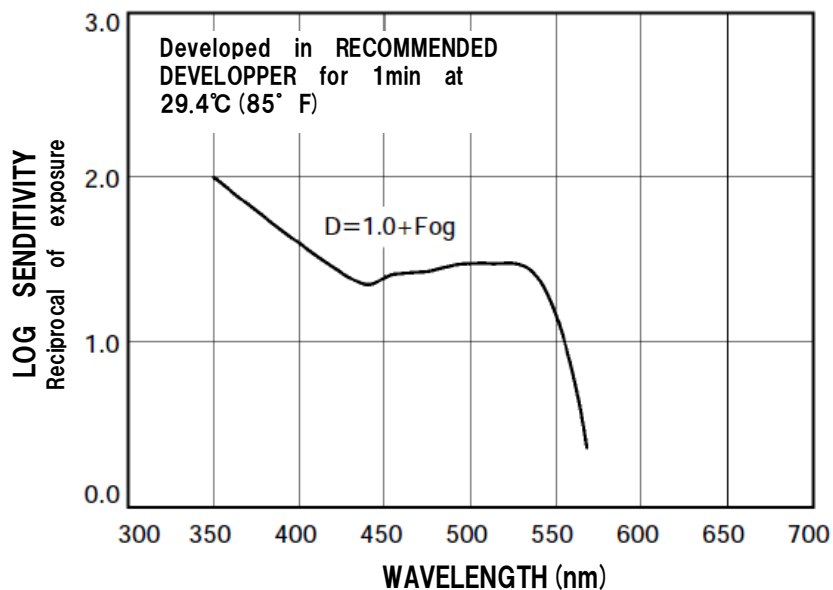

Reciprocity Curves

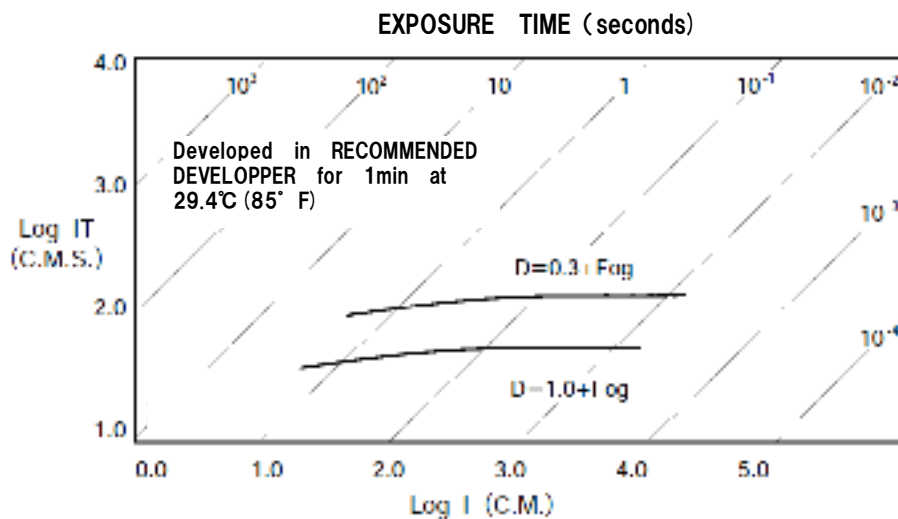

Modulation Transfer Function Curve

