

FUJIFILM MINIPOSITIVE FILM PET-100

Exposure Index 2.5 by Tungsten light exposure and AP5 standard processing.
The exposure index is based on formula 45/E (M.C.S.) at a density of 1.2 above gross fog.

Sensitivity Blue (Regular type)

Safelight A safelight lamp should be equipped with Fuji safelight glass SLG2B (Red) and a 20-watt bulb, and should be kept at least four feet (1.2 meters) from the film.



Base PET-100 Polyester Clear base 0.100 mm (4 mils)

Resolving Power


Test Object Contrast	Lines/mm
1:1000	380

Measured on Fuji Resolution Tester Model FRE-1


Characteristic Curves

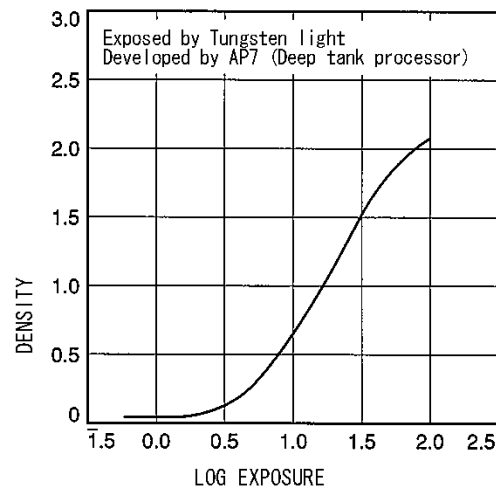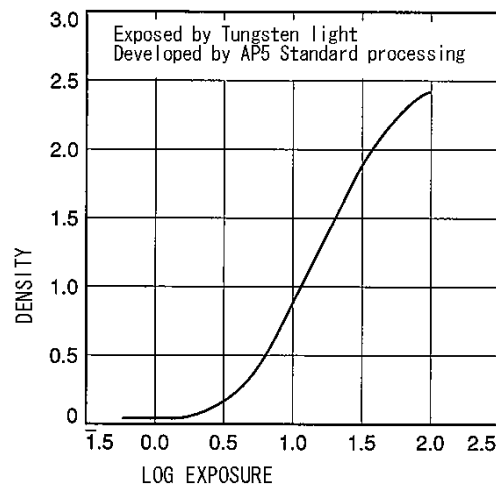

Spectral Sensitivity Curves

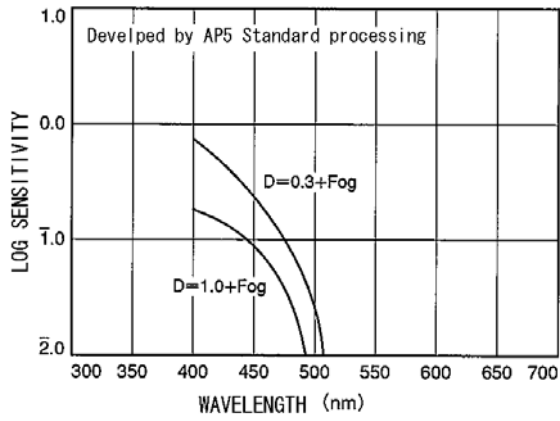

Reciprocity Curves

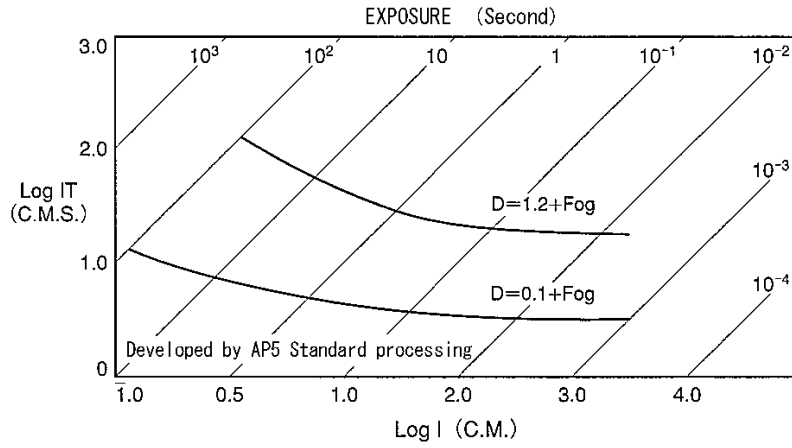

Modulation Transfer Function Curve

